




The SAP10e access point allows up to 10 SLATE106 e-papers to be connected to a TCP/IP network.

In its standard version, the access point can be used with the MS-PowerPoint software supplemented by the Qeedji Publisher Add-in. Updating the content displayed on the SLATE106 becomes easy; MS-PowerPoint slides will be shown directly on screens after a publication order.

Other versions of firmware, dedicated to our partners, allow the content of SLATE106 to be synchronized with a server dedicated to the build of the images to be displayed.

Connected directly to a powered RJ45 (PoE), its commissioning consists in pairing the SLATE106 using a web browser or a configuration file.

Strengths	Specification	
<ul style="list-style-type: none"> ▪ Power Over Ethernet (PoE) ▪ RJ45 male integrated ▪ Very low power: 0,75W ▪ Beacon BLE 5 compliant ▪ Modular firmware 	<p>Settings :</p> <p>Web UI HTML5</p> <p>Protocols :</p> <p>HTTP(S), IPv4</p> <p>Processors :</p> <p>Nordic Semiconductor nRF52 ARM CryptoCell 310</p> <p>Peripherals :</p> <p>1x male RJ45 PoE 802.3af 1x Bluetooth 5</p> <p>Stockage :</p> <p>Internal Flash memory</p> <p>Software compatibility :</p> <p>REST API</p>	<p>Network :</p> <p>1x Ethernet 10/100 BaseT 1x Bluetooth 5 (long range BLE)</p> <p>Power supply :</p> <p>PoE 802.3af</p> <p>Environment :</p> <p>Temperature: 0 ~ 40°C</p> <p>Physical Characteristics :</p> <p>Weight: 35 gr Dimensions (WxHxD) : 37x53,55x15,75 mm</p> <p>Warranty :</p> <p>1 year (parts and labor)</p> <p>Manufacturer :</p> <p>Qeedji</p>

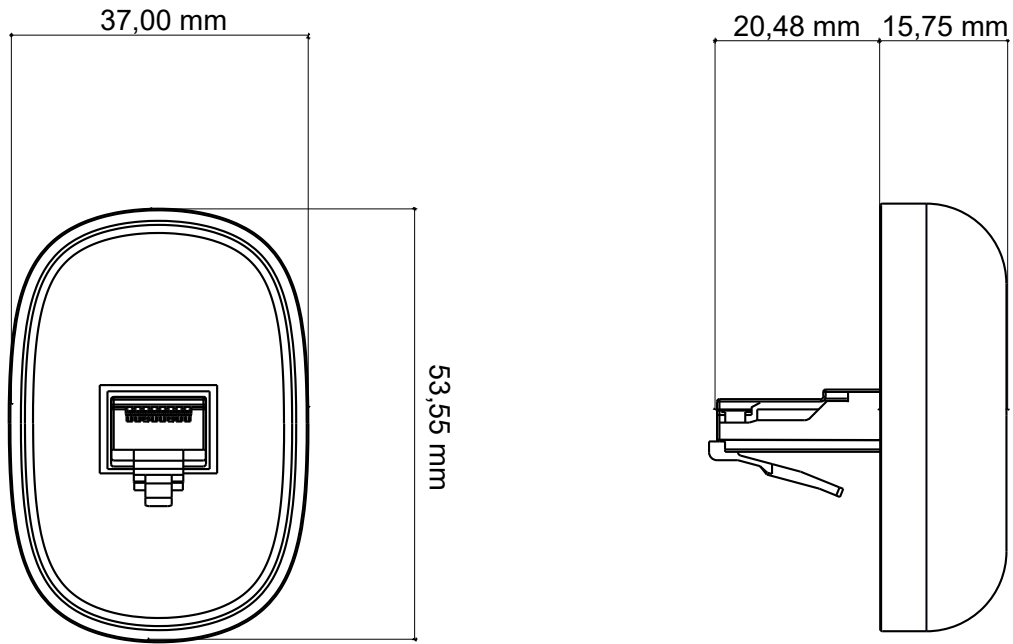

Ordering Information

Platform Reference	Description
SAP10E	Slate Access Point

